

Professional Leaf Blowers - LBV Series

For tractors 100 - 150HP

LBV 3300 M width 250 cm

LBV 3300 H width 270 cm

LBV 4300 M width 250 cm

LBV 4300 H width 270 cm



- This is our range of professional tractor mounted blowers for compact and sub-compact tractors.
- The LBV has a light weight, dynamically balanced aluminium fan producing an air velocity of 230 km/h allowing even wet heavy material to be lifted from the surface and blown up to 8 meters.
- Very low noise is achieved with the use of inlet and outlet silencers and a one piece plastic fan housing. The resulting sound-pressure at the ear of the operator is $\leq 84\text{dB}$ allowing the use of the LBV without the need of ear protection, allowing use in more built up areas.
- Easy adjustment of the air direction is possible allowing fast results even in places with restricted manoeuvrability.
- Large casters allow the machine to follow contours with ease and cushion the impact on all parts of the blower and tractor extending its life.
- The LBV can be supplied with a variety of mounting frames and PTO speeds to suit tractor front linkage or special brackets for most leading brands of upfront mowers. Allowing you to use your mower as a multifunctional tool. The Brackets allow mounting in just a few minutes, getting you on the job quicker
- The light weight design (at just 95kg) allows fitment to smaller tractor units.

For more info



HYDRAULIC DRIVE

LBV 3300 H

LBV 4300 H

Air Output	60m3/Min	80m3/Min
Weight	95kg	95kg
Oil flow required to operate	40l/min	40l/min
Air reach	Approx 8m	Approx 8m

MECHANICAL DRIVE

LBV 3300 M

LBV 4300 M

Air Output	60m3/Min	80m3/Min
Weight	95kg	95kg
Oil flow required to operate		
Air reach	Approx 8m	Approx 8m


Optional Accessories

- 1 Hydraulic angling 360 degree rotational outlet chute

LBV-HUT-HD

1 Hydraulic Angling 360 degree chute

The LBV range come with a fixed outlet chute as a standard feature. This can be replaced at purchase with a chute that can be rotated 360 degrees in order to direct the flow of air in a place of choosing . The hydraulic operation of this makes it comfortable to use from the cab. A set of double acting spool valves is required to operate this accessory.

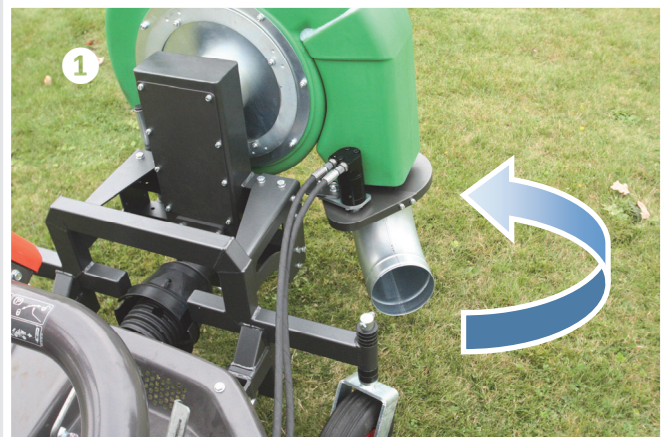

Mounting options for Kersten KM 45 Series

The following options are the basic types of mounting systems. Within these broad categories are many individual varieties; particular to power unit or linkage manufactures. Precise details of mounting vehicle should be supplied to ensure correct fitment.

ABR LBV DP - Tractor CAT 1 or CAT 2 linkage with link arms. The bracket is fixed to the sweeper because tractor front linkage provides float for the blower.

ABR LBV KD - Tractor front linkage with CAT 1 or CAT 0 A-Frame connection. Allows blower to connect to a linkage triangle

ABR LBV FM— Out front Mower front linkage with lift arms .The bracket is fixed to the blower because Mower lift arms provide float for the blower. Allows blower to connect to front mower lift arms.

